
ORION ONYX CUT EDGE





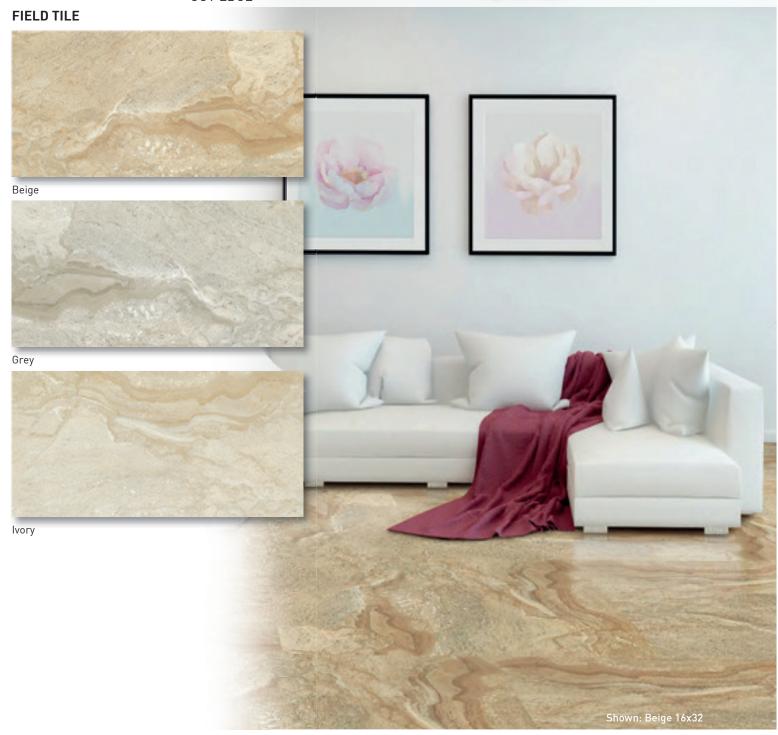

| SPECI | ы | CAL | IONS | |
|-------|---|-----|------|--|

| Application | Floor | |
|-----------------|---------------------|--|
| Visual | Polished Travertine | |
| Туре | H.D.I.T. Porcelain | |
| Slip Resistant | No | |
| PEI Rating | 4 | |
| Frost Resistant | Yes | |
| Shade Variation | Moderate/High | |
| Screens/Faces | 6 | |



SIZES

16x32 Polished Floor

3x16 Polished Floor Bullnose

Note: Manufacturer does not recommend installing large format rectangular tile using a 50% staggered brick/running bond grout joint pattern. Joint locations can be random and should be positioned to be no less than 30% the length of the adjacent tile. Alternating joints so they are <30%, a straight-lay or herring bone patterns are acceptable and with grout joint sizes of 1/4" to 3/16" but no less than 1/8".