STEELWALK

RECTIFIED

FIELD TILE



Crome



Metal



Nikel



SPECIFICATIONS

Rust

Mosaic (Rust shown)

Shown: Rust 24x24


~~~~~

TESORO

Application	Floor
Visual	Distressed Steel
Туре	H.D.I.T. Rectified Porcelain
Slip Resistant	Yes
PEI Rating	4
Frost Resistant	Yes
Shade Variation	Moderate/High
Screens/Faces	24x24 (14), 12x24 (28)

Made in Italy

SIZES

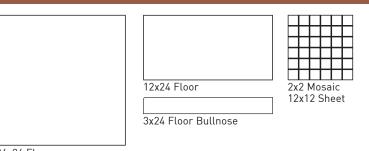

24x24 Floor

Note: Manufacturer does not recommend installing large format rectangular tile using a 50% staggered brick/running bond grout joint pattern. Joint locations can be random and should be positioned to be no less than 30% the length of the adjacent tile. Alternating joints so they are <30%, a straight-lay or herring bone patterns are acceptable and with grout joint sizes of 1/4" to 3/16" but no less than 1/8".

V3